Mässingsnylonisolerade terminaler - Han-, hon- och flaggterminaler

Model No. JW-TM03



SPECIFICATIONS

Material	Mässing
Isolering	Nylon
Temperaturbeständighet	105°C
Ytbehandling	Tennplätering
Typer	Hanterminal, honterminal, flaggterminal

Messingsnylonisolerade han- och honterminaler, rullflagghylsor
Isoleringshölje honterminal, hanterminal, flaggterminal.

En mängd olika specifikationer ger dig många valmöjligheter.

Färgen är tydlig och tydlig vid en första anblick vid användning

Allmänna verktyg kan krympas utan punktsvetsning och annan bearbetning

Material Brass

Slida nylon

Temperatur 105 grader

Ytbehandling Tennplätering

High Quality | Resistant | Multicolor | Safe

With insulated sheathed tube terminal

Complete models to meet your shopping needs



With insulation sheath fork terminal

Safe and secure crimping (for flexible cords)
Current: 19A-48A
Bolt diameter: 3.2~10.5mm




With insulating sheath round terminal


Flame retardant tin plating, good electrical conductivity

Maximum current: 19A-48A
Bolt diameter: 3.2~10.5mm



Insulation sheath female terminal (oval mouth)

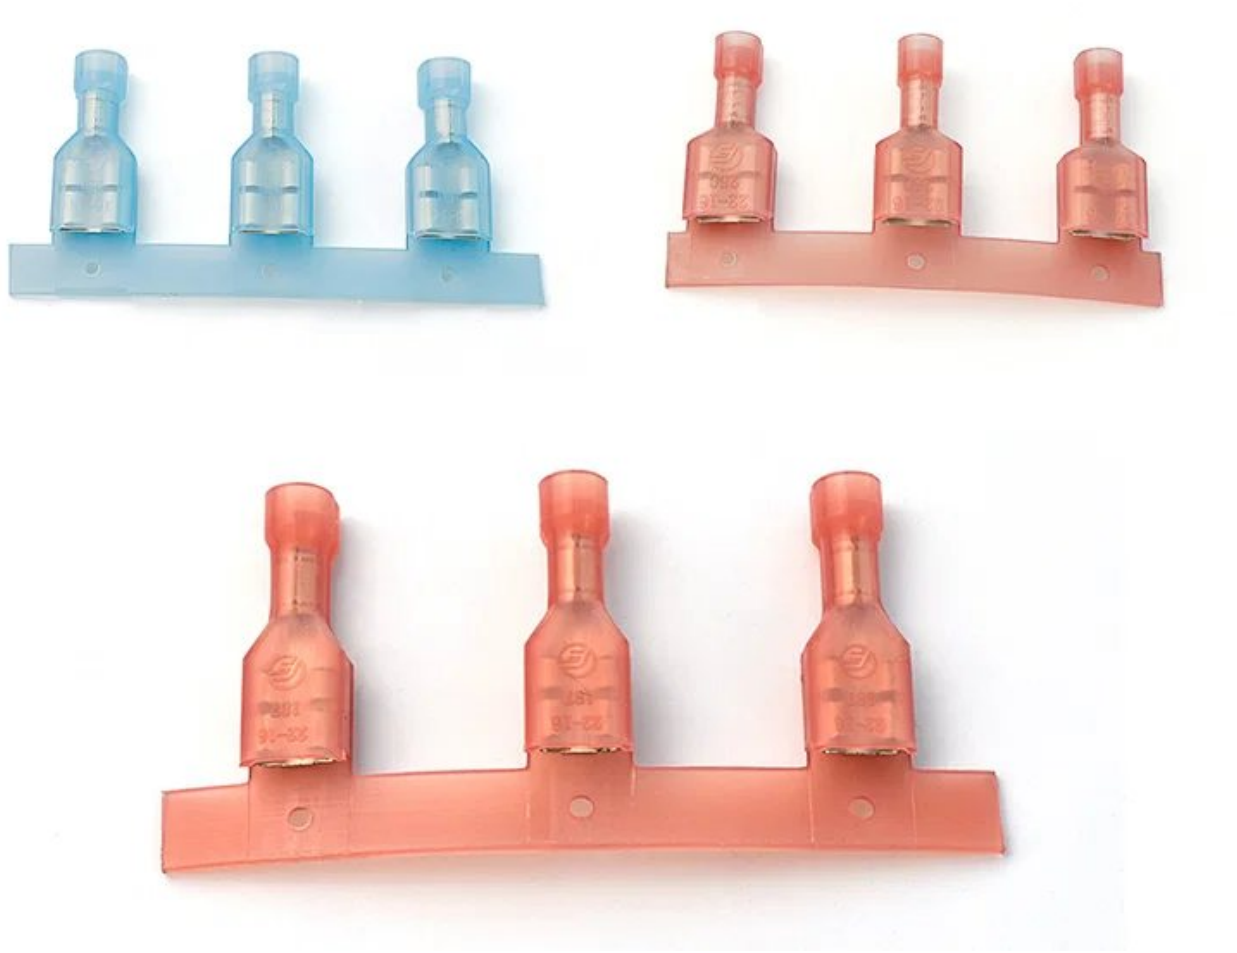

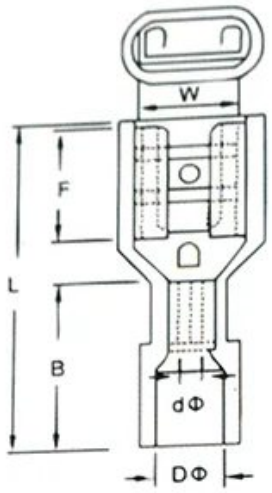



Material: Brass
Sheath: Nylon
Temperature: 105°C
Surface Treatment: Tin Plating

UL LISTED E341425 c UL CE SGS

型号 Item NO	导线截面mm² Cable Size A.W.G	最大电流 Max Current	接插规格 Connecting spec.	材料厚度 Thickness (mm)	尺寸 Dimension(mm) W	F	L	B	Dϕ	dϕ	颜色 Color
FDFN 1.25-110(5)	0.5~1.5 (22~16)	10A	0.5×2.8	0.3	4.0	6.4	19.0	10.5	4.5	1.7	red
FDFN 1.25-110(8)			0.8×2.8	0.3	4.0	6.4	19.0	10.5	4.5		
FDFN 1.25-187(5)			0.5×4.75	0.4	5.0	6.4	21.4	10.5	3.5		
FDFN 1.25-187(8)			0.8×4.75	0.4	5.0	6.4	21.4	10.5	3.5		
FDFN 1.25-250			0.8×6.35	0.4	7.6	7.3	22.0	11.0	4.5		
FDFN 2-187(5)	1.5~2.5 (16~14)	15A	0.8×4.75	0.4	5.0	6.4	21.4	10.5	4.2	2.3	blue
FDFN 2-187(8)			0.8×4.75		5.0	6.4	21.4	10.5	4.2	2.3	
FDFN 2-250			0.8×6.35		7.6	7.3	22.0	11.0	4.8	2.3	
FDFN 5-250	4~6 (12~10)	24A	0.8×6.35	0.45	7.6	7.3	24.2	13.0	6.7	3.4	yellow

Insulation sheath female terminal (square mouth)

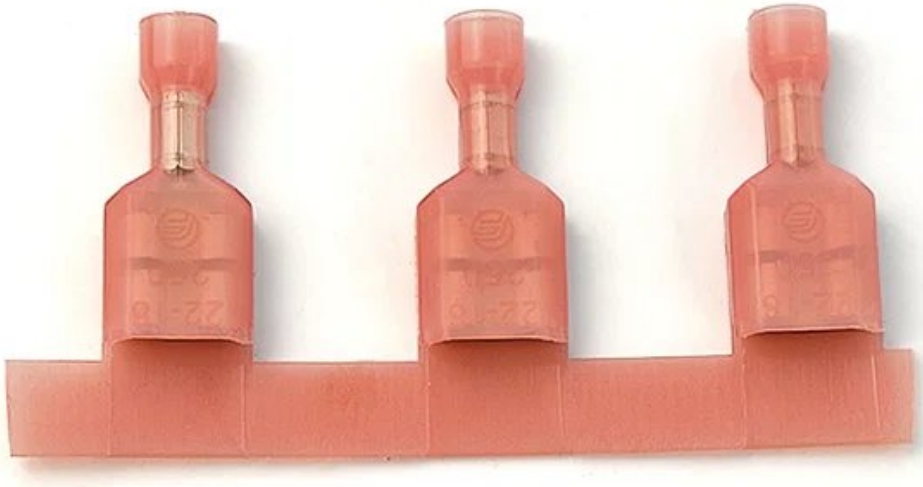

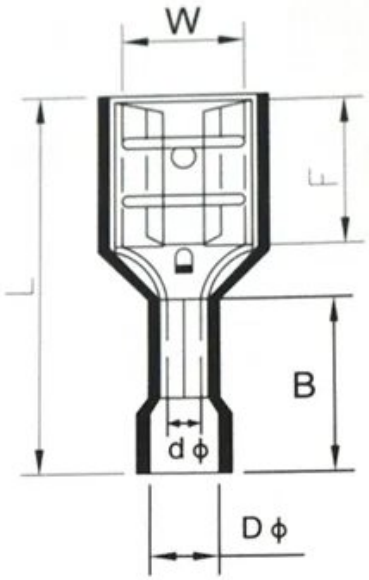

Material: Brass
Sheath: Nylon
Temperature: 105°C
Surface Treatment: Tin Plating


UL LISTED E341425 c UL CE SGS

Item NO	Cable Size A.W.G	Max Current	Connecting spec.	Thickness (mm)	Dimension(mm)						Color
					W	F	L	B	D ϕ	d ϕ	
FDFN 1.25-110(5)	0.5~1.5 (22~16)	10A	0.5 × 2.8	0.3	4.0	6.4	18.7	9.0	3.1	1.7	红 red
FDFN 1.25-110(8)			0.8 × 2.8	0.3	4.0	6.4	18.7	9.0	3.1		
FDFN 1.25-187(5)			0.5 × 4.75	0.35	5.9	6.4	22.0	10.5	3.7		
FDFN 1.25-187(8)			0.8 × 4.75	0.35	5.9	6.4	22.0	10.5	3.7		
FDFN 1.25-250			0.8 × 6.35	0.4	7.6	7.6	22.0	10.0	4.5		
FDFN 2-110(5)	1.5~2.5 (16~14)	15A	0.5 × 2.8	0.3	4.0	6.4	18.7	9.0	4.2	2.3	蓝 blue
FDFN 2-110(8)			0.8 × 2.8	0.3	4.0	6.4	18.7	9.0	4.2	2.3	
FDFN 2-187(5)			0.8 × 4.75	0.35	5.9	6.4	21.8	10.0	4.2	2.3	
FDFN 2-187(8)			0.8 × 4.75	0.35	5.9	6.4	21.8	10.0	4.2	2.3	
FDFN 2-250			0.8 × 6.35	0.4	7.6	7.6	22.0	11.0	4.3	2.3	
FDFN 5.5-250	4~6 (12~10)	24A	0.8 × 6.35	0.45	7.6	7.6	23.7	13.0	8.5	3.4	黄 yellow

Fully insulated sheath male terminal (square mouth)





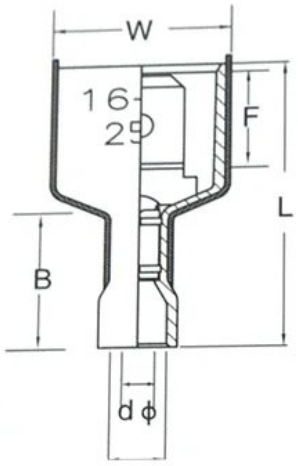

Material: Brass
Sheath: Nylon
Temperature: 105°C
Surface Treatment: Tin Plating

Item NO	Cable Size A.W.G	Max Current	Connecting spec.	Thickness (mm)	Dimension(mm)						Color
					W	F	L	B	D ϕ	d ϕ	
MDFN1.25-187(5)	0.5~1.5 (22~16)	10A	0.5x4.8	0.5	10.4	6.3	20.4	10.0	3.6	1.7	red
MDFN1.25-187(8)	0.5~1.5 (22~16)	10A	0.8x4.8	0.8	10.4	6.3	20.4	10.0	3.6	1.7	
MDFN1.25-250	0.5~1.5 (22~16)	10A	0.8x6.35	0.8	12.3	7.7	21.8	10.0	3.6	1.7	


Item NO	Cable Size A.W.G	Max Current	Connecting spec.	Thickness (mm)	Dimension(mm)						Color
					W	F	L	B	D ϕ	d ϕ	
MDFN2-187(5)	1.5~2.5 (16~14)	15A	0.5x4.8	0.5	10.4	6.3	20.4	10.0	4.3	2.3	blue
MDFN2-187(8)	1.5~2.5 (16~14)	15A	0.8x4.8	0.8	10.4	6.3	20.4	10.0	4.3	2.3	
MDFN2-250	1.5~2.5 (16~14)	15A	0.8x6.35	0.8	12.3	7.7	21.8	10.0	4.3	2.3	

Item NO	Cable Size A.W.G	Max Current	Connecting spec.	Thickness (mm)	Dimension(mm)						Color
					W	F	L	B	D ϕ	d ϕ	
MDFN5.5-250	4~6 (12~10)	24A	0.8x6.35	0.8	12.3	7.7	21.8	10.0	6.5	3.4	yellow

Fully Insulated Sheathed Flag Female Terminals





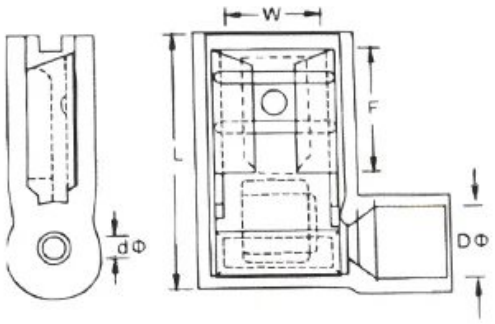

Material: Brass
Sheath: Nylon
Temperature: 105°C
Surface Treatment: Tin Plating

型号 Item NO	导线截面mm² Cable Size A.W.G	最大电流 Max Current	接插规格 Connecting spec.	材料厚度 Thickness (mm)	尺寸 Dimension(mm) W	F	L	Dϕ	dϕ	颜色 Color
FLDNY1.25-187(5)	0.5~1.5 (22~16)	10A	0.5x4.8	0.4	6.9	7.0	16.6	4.6	1.7	红 red
FLDNY1.25-187(8)	0.5~1.5 (22~16)	10A	0.8x4.8	0.4	6.9	7.0	16.6	4.6	1.7	
FLDNY1.25-250	0.5~1.5 (22~16)	10A	0.8x6.35	0.4	8.5	8.0	16.6	4.6	1.7	

型号 Item NO	导线截面mm² Cable Size A.W.G	最大电流 Max Current	接插规格 Connecting spec.	材料厚度 Thickness (mm)	尺寸 Dimension(mm) W	F	L	Dϕ	dϕ	颜色 Color
FLDNY2-187(5)	1.5~2.5 (16~14)	15A	0.5x4.8	0.4	6.9	7.0	16.6	5.3	2.3	蓝 blue
FLDNY2-187(8)	1.5~2.5 (16~14)	15A	0.8x4.8	0.4	6.9	7.0	16.6	5.3	2.3	
FLDNY2-250	1.5~2.5 (16~14)	15A	0.8x6.35	0.4	8.5	8.0	16.6	5.3	2.3	

Brass Nylon insulated sheath male and female terminals Roll flag sleeves terminal, Sleeves Terminal, Insulated Terminal

Brass Nylon insulated sheath male and female terminals Roll flag sleeves terminal, Sleeves Terminal, Insulated Terminal

Brass Nylon insulated sheath male and female terminals Roll flag sleeves terminal, Sleeves Terminal, Insulated Terminal

Brass Nylon insulated sheath male and female terminals Roll flag sleeves terminal, Sleeves Terminal, Insulated Terminal