Kontinuerliga Nylonisolerade Ringterminaler, Blå, 2000PCS/Roll

Model No. JW-TM01



SPECIFICATIONS

Material	Koppar
Temperatur	75/105 grader
Mantel	Nylon PVC
Ytbehandling	Tennplätering
Kvantitet	2000PCS/Roll

kontinuerlig kallpressad nylonisolerad ringterminal Blå sladdändsterminaler, kontinuerlig kallpressad Nylonisolerad ringterminal Blå sladdändterminaler, kontinuerlig kallpressterminal, sladdändsterminaler, isolerad ringterminal
Blå nylon PVC-isolerad ringterminal
Utsökt och bra materialval gör produkten hög säkerhetsprestanda och lång livslängd.
Lämplig för anslutning av utrustning i kraftfördelningsenheter.
Material Koppartemperatur
75/105 grader
Mantel Nylon PVC
Ytbehandling Tennplätering
Q.ty 2000PCS/Roll





With insulation sheath blade terminal

Current: 18A-48A
Copper has good conductivity
Flame retardant and tinned



With insulation sheath spring terminal




Reliable quality of real materials
Exquisite and good selection of materials makes the product high safety performance and long service life
Copper tinned terminal block
High-quality red copper conductive must be strong
Surface tin plating process to resist oxidation
PVC insulation
Flame retardant material
Two materials optional
Nylon insulation
Flame retardant material


Stability means that the foundation of the terminal cannot fall off and cannot be broken
It is made by stamping process and stamped on a stamping press, which can effectively resist interference and increase the service life.
withstand high tensile force

With insulating sheath round terminal


Flame retardant tin plating, good electrical conductivity


Maximum current: 19A-48A
Bolt diameter: 3.2~10.5mm



Sample renderings display

Applicable cord

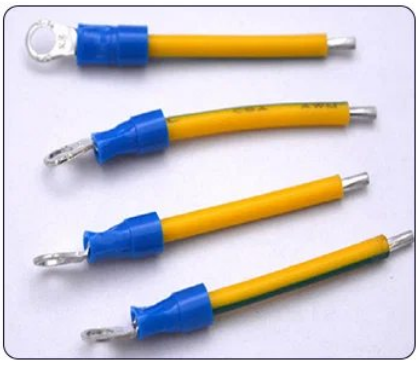

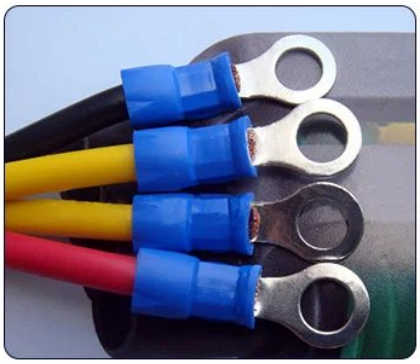
Product parameters

Material: copper
Temperature: 75℃/105℃
Sheath: Nylon/PVC
Surface Treatment: Tin Plating





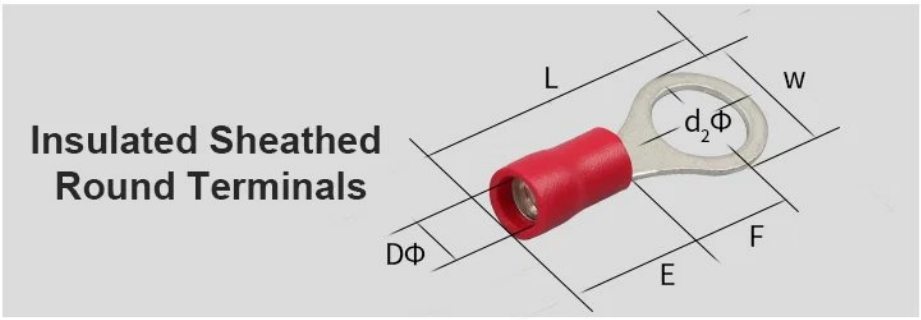

Red (nylon/PVC [add P at the back] optional)

Item NO	Cable Sze A.W.G	Thickness (mm)	Max Current	USA Screw	ScrewDia.d2(mm)	Size				DΦ
						W	L	F	E	
RVN1.25-3	0.5-1.5 (22-16)	0.75	19A	#4	3.2	5.7	18.5	5.0	10.0	4.0
RVN1.25-3.5 S				#6	3.7	5.7	185	5.0		
RVN1.25-3.5M				#6	3.7	6.6	20.0	6.3		
RVN1.25-35 L				#6	3.7	8.0	215	7.0		
RVN1.25-4 S				#8	4.3	6.6	19.5	63		
RVN1.25-4L				#8	4.3	8.0	21.5	7.0		
RVN1.25-5S				#10	5.3	8.0	21.5	7.0		
RVN1.25-5L				#10	5.3	9.8	23.5	8.5		
RVN1.25 6S				1/4	6.4	9.8	23.0	8.5		
RVN1.25-6L				1/4	6.4	11.6	27.5	11		
RVN1.25-8				5/16	8.4	11.6	27.5	11		
RVN1.25-10				3/8	10.5	13.6	31.6	14		

Blue (nylon/PVC [add P at the back] optional)

Item NO	Cable Sze A.W.G	Thickness (mm)	Max Current	USA Screw	ScrewDia.d2(mm)	Size				DΦ
						W	L	F	E	
RVN2-3	1.5-25 (16-14)	0.8	27A	#4	3.2	6.6	17 3	4.3	10.0	4.6
RVN2-35S				#6	3.7	6.6	17.3	4.3		
RVN2-3.5 M				#6	3.7	6.6	19.5	6.5		
RVN2-3.5 L				#6	3.7	8.5	21.8	7.7		
RVN2-4 S				#8	4.3	6.6	19 5	6.5		
RVN2-4L				#8	4.3	8.5	21 8	7.7		
RVN2-5 S				#10	5.3	8.5	21.8	7. 7		
RVN2-5L				#10	5.3	9.5	21.8	7.2		
RVN2-6				1/4	6.4	12.0	26.8	11.0		
RVN2-8				5/16	8.4	12.0	26.8	11.0		
RVN2-10				3/8	10.5	14.6	31.5	14		

Black (nylon/PVC [add P at the back] optional)

Item NO	Cable Sze A.W.G	Thickness (mm)	Max Current	USA Screw	ScrewDia.d2(mm)	Size				DΦ
						W	L	F	E	
RVN3.5 4	2.5~4.0 (14-12)	1.0	37A	#8	4.3	8.0	24.5	7.7	13.0	6.5
RVN35-5 S				#10	5.3	8.0	24.5	7.7		
RVN3.5-5 L				#10	5.3	12.0	27.9	8.6		
RVN3.5-6				1/4	6.4	12.0	27.9	8.6		
RVN35-8				5/16	8.4	15.0	34.0	14		
RVN3.5-10				3/8	10.5	15.0	34.0	14		

Yellow (nylon/PVC [add P at the back] optional)

Item NO	Cable Sze A.W.G	Thickness (mm)	Max Current	USA Screw	ScrewDia.d2(mm)	W	L	F	E	DΦ
RVN5.5-3	4~6 (12-10)	1.0	48A	#4	3.2	7.2	22.7	5.9	14	7
RVN5.5-3.5				#6	3.7	7.2	22.7	5.9		
RVN5.5-4S				#8	4.3	7.2	22.7	5.9		
RVN5.5-4L				#8	4.3	9.5	26.3	8.3		
RVN5.5-5				#10	5.3	9.5	26.3	8.3		
RVN5.5-6				1/4	6.4	12.0	30	11		
RVN5.5-8				5/16	8.4	15.0	34.5	13.7		
RVN5.5-10				3/8	10.5	15.0	34.5	13.7		

Function Features

