Handhållen halvautomatisk vridmaskin för flersträngad tråd WPM-NX3612AJ

Model No. WPM-NX3612AJ



SPECIFICATIONS

Arbetsspänning	Strömadapter

Handhållen vridmaskin, halvautomatisk vridmaskin, manuellt vridverktyg, elektrisk vridmaskin, flersträngad vridmaskin

Tekniska parametrar**:**

Arbetsspänning	Strömadapter	Storlek **(mm)** •	Vikt **(g)**	Kabellängd (m)	Anslutningslängd för fotbrytare **(m)**
DC 24V	Strömingång: AC100-240V /50/60Hz, Utgång: DC24V	Längd: 248,0 Max OD:51,0	535.0	1.2+2.0 (Kabelledning+ förlängningslinje)	2.0
In i tråd med håldiameter (mm)	Egenskaper för tvinnad tråd	**Trådens kärnlängd(mm)**	**Max** tvärsnittsarea för den tvinnade tråden **(mm^2)**	Minsta tvärsnittsarea för en tvinnad linje **(mm^2)**	Driftläge
8/12	Applicera på multikärnig flexibel sladd	10-20	4.0	0.3	Handpress/fotpress

Handheld desktop dual-purpose electric twisting machine

Multi-strands are used in parallel / can be tightened in half a second / high efficiency



Continuous copper wire Tighten the wire	easy to use Twisting is not tired
efficient Twisting	No hidden danger Non-flying copper wire



Portable mobile twisting tool

Φ13mm large-diameter screw thread opening, adapt to the thickness of the wire diameter, the transparent cover can be removed to make the opening wider

Good twisting quality	Lightweight and compact	Flexible operation	Strong applicability

6 PRODUCT FEATURES

Say goodbye to the problems of hand-tightening, tired and slow screwing



01

Suitable for multi-strand parallel operation, twisted wires within 30mm in length

02

Desktop fixed use with foot switch operation is flexible, and the operation of the entrance port is more convenient

03

Hanging and handheld use does not occupy the position of the console

04

Simple assembly line operation

05

New grip artificial mechanics design

06

Replace manual threading to improve efficiency

Handheld desktop dual-purpose electric twisting machine

Twisted wire range: wire length within 30mm
Multi-strand cord ≤30mm²



1 strand, 2 strands, 3 strands, 4 strands, 5 strands, and multiple strands of copper core cords can be automatically tightened







Hanging hook
Pedal edge wiring
Body
Manual switch
power cable
transparent lid
Twisting port

Sample display

This machine supports 1 strand, 2 strands, 3 strands, 4 strands, 5 strands, and multiple strands of copper core cords to be twisted together







Product details





Manual switch

Touch the button switch, tighten the thread in half a second, it’s so fast

Twisting clamp

You can put multiple copper core wires into the twisting clamp, touch the button switch to complete the twisting

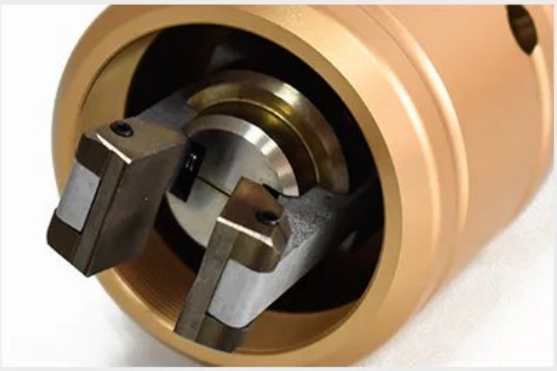

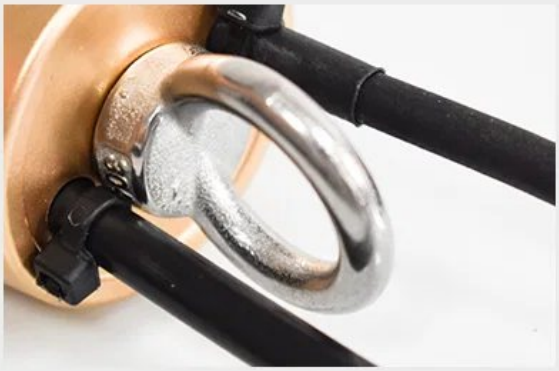

Hanging hook

Hanging and handheld use does not occupy the position of the console

Adjustable voltage

The voltage of the power adapter can be adjusted to a suitable value according to the wire specification, the smaller the wire diameter, and the larger the smaller diameter.





Desktop use

It can be fixed on the desktop, with a foot switch for flexible operation

transparent lid

The twisting machine port has a transparent cover that can be removed, and the transparent cover is larger.



Parts List



FAQ

Vilken strömingång accepterar WPM-NX3612AJ Semi-Automatic Handheld Wire Twisting Machine?

Strömingången är AC100-240V vid 50/60Hz, med en utgång på DC24V. Det breda AC-området innebär att maskinen kan användas i regioner med olika nätspänningar utan en separat transformator.

Vilka är de fysiska dimensionerna för WPM-NX3612AJ Handheld Wire Twisting Machine?

Maskinen har en längd på 248.0 och en maximal yttre diameter på 51.0. Dess kompakta handhållna format är avsett för tvinnningsarbete som utförs direkt vid kabelstammen i stället för vid en fast bänkstation.

Kan WPM-NX3612AJ Semi-Automatic Handheld Wire Twisting Machine köras på olika nätspänningar?

Ja. Den accepterar AC100-240V vid 50/60Hz och omvandlar detta till en DC24V utgång. Det universella ingångsområdet passar semiautomatisk tvinnning av ledning i verkstäder som körs på antingen låg eller hög nätspänning.