SVN Nylonisolerade Spadeterminaler 19A-48A, Koppar

Model No. JW-TM05



SPECIFICATIONS

Ström	19A-48A
Bultdiameter	3,2-10,5 mm
Material	Koppar
Temperatur	75/105 grader
Hölje	Nylon/PVC
Ytbehandling	Tennplätering

SVN nylonisolerade spadeterminaler, kontinuerlig spade koppartrådsändterminal, bultskarvterminal, spadeterminal, SVN spade terminal, kopparterminalbult

Spadeisolerade terminaler Rulla

Säker och trygg krimpning (för flexibla sladdar)

Aktuell: 19A-48A

Slutstyckets diameter: 3,2–10,5 mm

Material Koppar

Temperatur 75/105 grader


Mantel av nylon/PVC


Ytbehandling Tennplätering

With insulation sheath fork terminal

Safe and secure crimping (for flexible cords)
Current: 19A-48A
Bolt diameter: 3.2~10.5mm

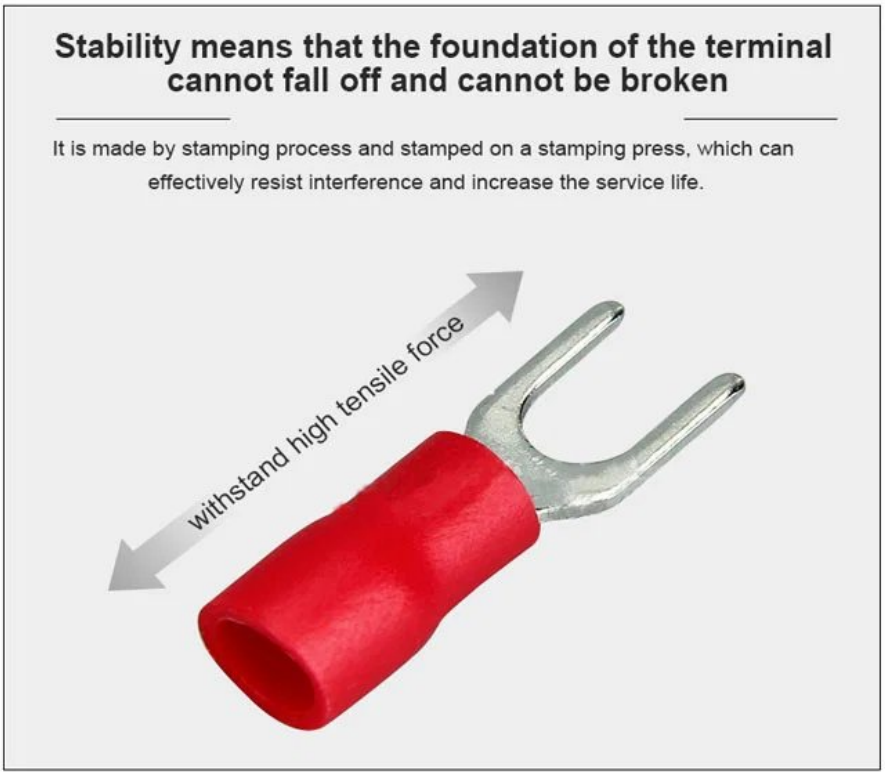


Stability means that the foundation of the terminal cannot fall off and cannot be broken
It is made by stamping process and stamped on a stamping press, which can effectively resist interference and increase the service life.
withstand high tensile force

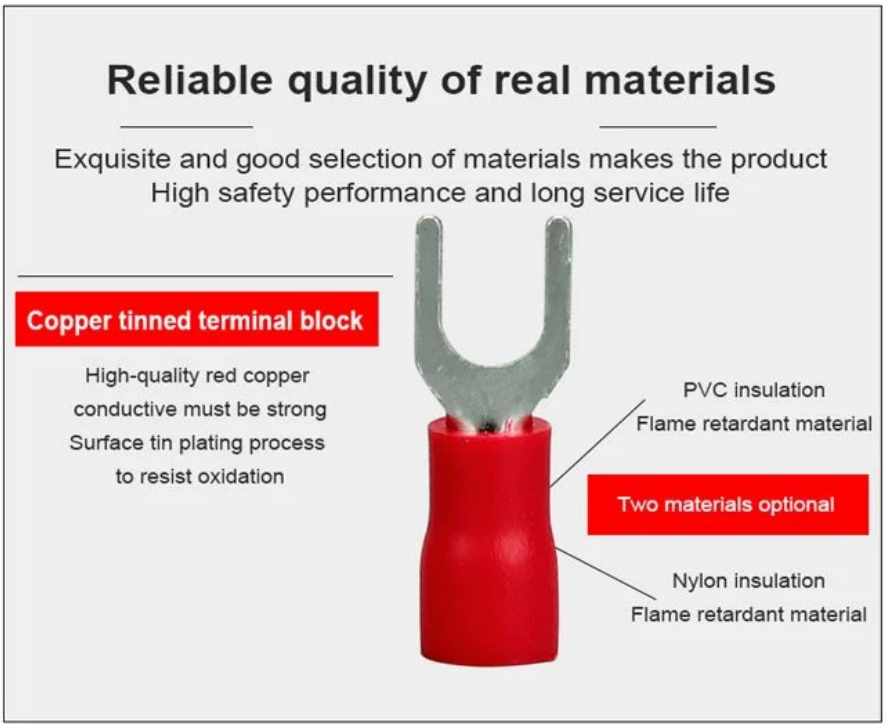
Reliable quality of real materials
Exquisite and good selection of materials makes the product
High safety performance and long service life
Copper tinned terminal block
High-quality red copper
conductive must be strong
Surface tin plating process
to resist oxidation
PVC insulation
Flame retardant material
Two materials optional
Nylon insulation
Flame retardant material



With insulation sheath blade terminal


Current: 18A-48A
Copper has good conductivity
Flame retardant and tinned



With insulation sheath spring terminal



Product parameters

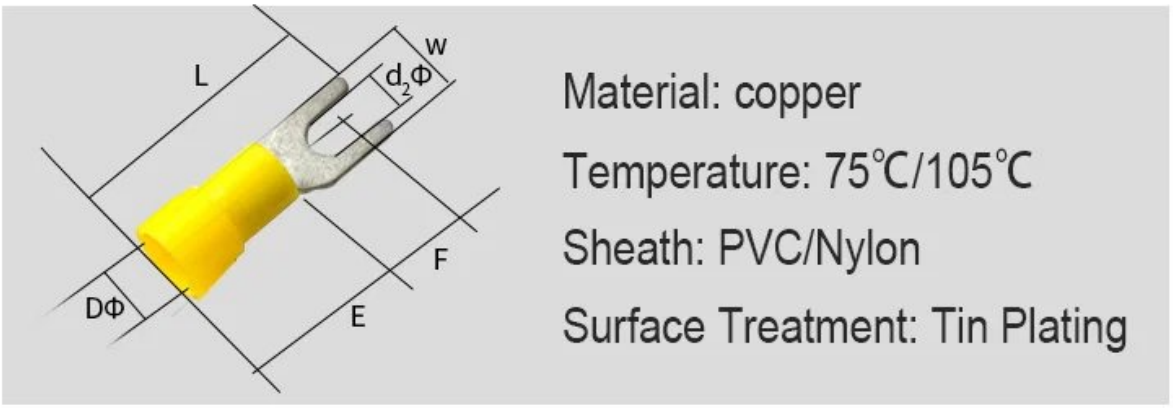

Red (nylon/PVC [add P at the back] optional)

Item NO	Cable Sze A.W.G	Thickness (mm)	Max Current	USA Screw	ScrewDia.d2(mm)	size				DΦ
						W	L	F	E	
SVN1.25- 3	0.5-1.5 (22-16)	0.75	19A	#4	3.2	5.7	21.2	6.5	10.0	4.0
SVN1.25-3.5S				#6	3.7	5.7	21 2	6.5		
SVN1.25 3.5L				#6	3.7	6.4	212	6.5		
SVN1.25- 4 S				#8	4.3	6.4	21 2	6.5		
SVN1.25-4 M				#8	4.3	7. 2	21.2	6.5		
SVN1.25-4 L				#8	4.3	8.1	21 2	6.5		
SVN1.25-5 S				#10	5.3	8.1	21 2	6.5		
SVN1.25-5L				#10	5.3	9.5	21 2	6.5		
SVN1.25- -6 S				1/4	6.4	9.5	21 2	6.5		
SVN1.25-6L				1/4	6.4	12.0	27.6	11.0		

FAQ

Vilka strömklasser täcker SVN Nylon Insulated Spade Terminals?

SVN-serien täcker strömklasser från 19A till 48A med en kopparkontakt. Detta område gör att en terminalfamilj kan betjäna både lätt styrledningsdragning och tyngre strömanslutningar.

Vilka bultdiametrar är SVN Nylon Insulated Spade Terminals konstruerade för att passa?

Dessa gaffelterminaler accepterar bultdiametrar från 3.2 mm till 10.5 mm. Det täcker ett brett spektrum av pinnstorlekar som vanligtvis finns i kontrollpaneler och utrustningsdragningar.

Hur matchar jag en SVN Nylon Insulated Spade Terminal mot min pinne och last?

Välj den bultdiameter som passar din pinne, från 3.2 till 10.5 mm, och bekräfta sedan att kretsströmmen ligger inom området 19A till 48A som serien täcker.